





Saddle Mount Detail

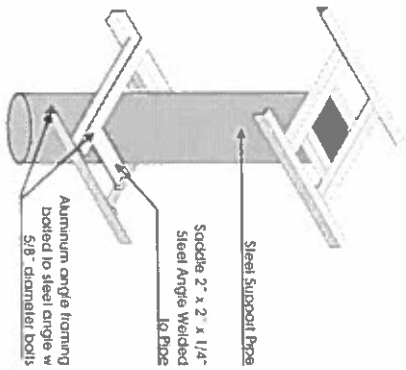

• 0.063" aluminum skin and 2.0" x 2.0" aluminum frame

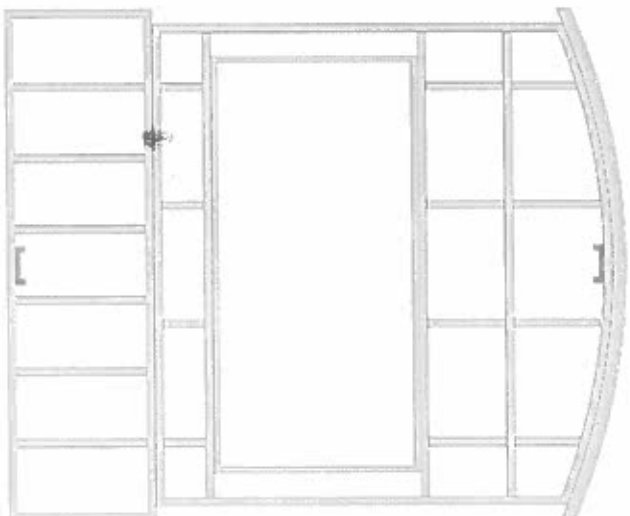

WIND DESIGN CRITERIA

WIND VELOCITY	132 MPH
RISK CATEGORY	B
LOADING CATEGORY	C
WIND PRESSURE COEFFICIENT	-0.9
WIND FORCE COEFFICIENT	38.8 PSF
WIND FORCE COEFFICIENT	1.7

- Design wind pressure in conformance w/ FBC-2017 Ed Ref. ASCE7. See chart for design criteria per ASCE 7-10.
- EFIS Wall Attachment:
 - ASTM A307 3/8" x 3" Hilti loggiers fastened into Stucco over plywood fascia, top and bottom as per detail.
 - CMU Wall Attachment: 3/8" x 3" fully embedded Tapcon anchors top and bottom as per detail.

TAYLOR
Sign & Design, Inc.
 COMMERCIAL SIGN TECHNOLOGIES
Made & crafted in EST2000117
 www.TaylorSignCo.com
 4162 St Augustine Rd, Jacksonville, FL 32207
 Phone 904/396 4652 • Fax 904/396-3777

COMPANY:
SAN MARCO CHURCH

CONTACT: Steve Poinier
 PHONE 904 553-3250
 EMAIL steve.poinier@comcast.net

ADDRESS: 1620 Noido Ave
 Jacksonville, FL 32207

DATE: 12/10/19
REVISIONS: R1-12/11/19
 R2-12/12/19

SALES PERSON: Chris Taylor
DESIGNER: Guy Browning
ZONING: RMD-D
 50 sq ft max
 12 ft ht max

APPROVED BY: _____
DATE: _____

SAVED AS: San Marco Church - Monument

This artwork protected under copyright law and is the property of Taylor Sign & Design, Inc. And is not to be duplicated, reproduced, or distributed without written permission.
 ©2018 Taylor Sign & Design, Inc

This sign meets or exceeds 132 mph wind zone requirements as per 2017 Florida Building Code.

ALL COLORS, DIRECTIONS, VERBIAGE, LAYOUT, ETC. ARE CORRECT BEFORE APPROVING RENDERING. COLORS CAN NOT MATCH FINAL PRODUCT DUE TO THE DIFFERENCE BETWEEN DIGITAL AND PRINTED COLORS. ONCE APPROVED, THE CLIENT WILL BE RESPONSIBLE FOR ANY PROBLEMS FOUND AFTER INSTALLATION.

